

Prime Light

PL01/PL03/PL05



SUNESSE[®]
Sunscreen Finesse

By *Hande*

Product Certificate

Fire, Smoke Classification	FR (US) - NFPA 701 TM#1 B2(CN) - GB17591	
Health & Safety	Oeko-tex Standard 100 class IV RoHS - lead Free Reach 1907-2006 SHVC	Greenguard® Gold EN71 Part 3:1994 GB18586 - 2001
Colour fastness to light	Grade 8 ISO105 B02:2014 ≥4.0 AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp	
Warranty	5 Years	



Technical Data


STYLE		PL01	PL03	PL05
Composition		25% Polyester 75% PVC	25% Polyester 75% PVC	25% Polyester 75% PVC
Openness Factor		≈1%	≈3%	≈5%
UV Screen		Up to 99%	Up to 97%	Up to 95%
Width	inch cm	98"-118" 250-300	98"-118" 250-300	98"-118" 250-300
Weight	oz/yd ² (ISO 2286-2) g/m ²	13.42±5% 455 ± 5%	12.39±5% 420 ± 5%	11.80±5% 400 ± 5%
Thickness	inch (ISO 2286-3) mm	0.023 ± 5% 0.58 ± 5%	0.022 ± 5% 0.56 ± 5%	0.021 ± 5% 0.54 ± 5%
MECHANICAL RESISTANCE				
Breaking	Warp (ISO 13934-1) Weft	≥1800 N/5cm ≥1450 N/5cm	≥1800 N/5cm ≥1400 N/5cm	≥1800 N/5cm ≥1280 N/5cm
Tear	Warp (ISO 4674) Weft	≥120 N ≥ 85 N	≥ 130 N ≥ 110 N	≥ 130 N ≥ 100 N
Packing	(Roll Length)	32.8 yards 30 lm	32.8 yards 30 lm	32.8 yards 30 lm

Openness Factor

White * White



1%

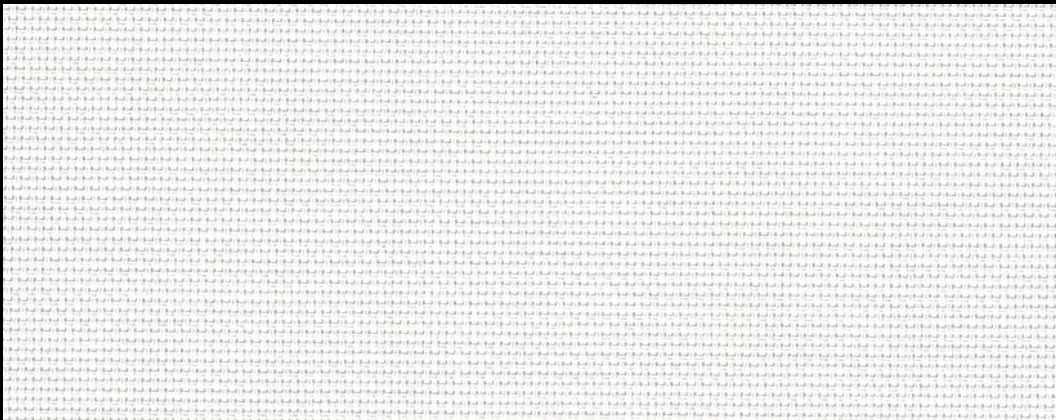


3%




5%

Colours


Prime Light 5%

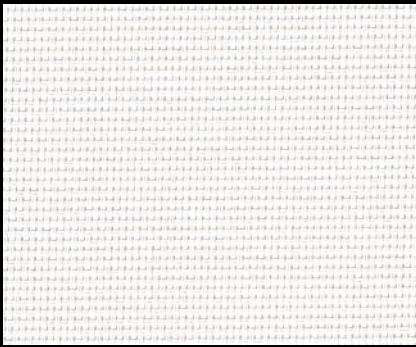


M01 White*White

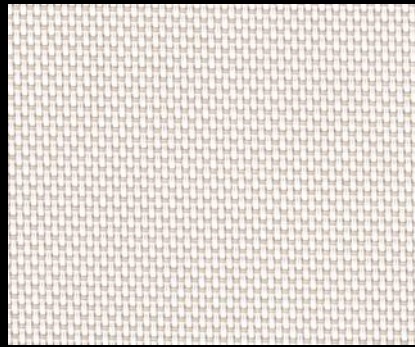


M16 White*Linen

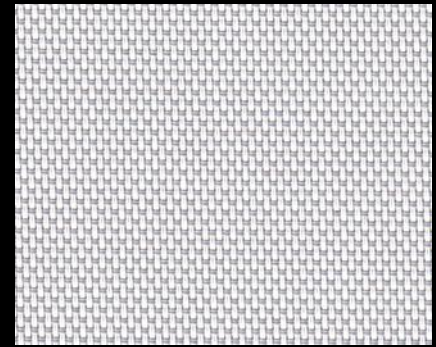

M03 White*Grey

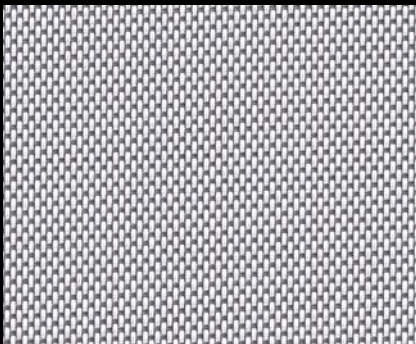

M17 White*Dark Grey

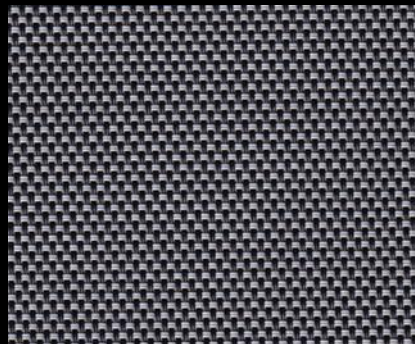

M19 Black*Pearl



M22 Black*Dark Grey



M18 Black*Black

* Colours may be slightly different from the actual ones.



Hande[®]

Guangzhou Hande New Materials Co.,Ltd

Add: No.161, Yao TianHe Street, Yong shun Avenue, Yonghe Economic Zone,
GZ Economic&Technological Development District, Guang zhou, China

Tel: 86-20-3222888 Fax: 86-20-3222205 PostCode: 511356

PLil: info@handegroup.com.cn

www.handoblinds.com